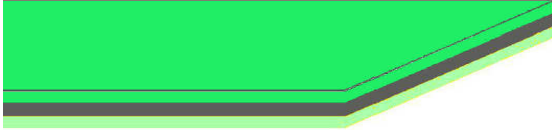


Product Data Sheet T32PLG**Main industries**

Textile, Paper, Logistics

Key applications

Tangential belt, Twister belt, Live roller belt

Belt specification

Thickness		3.2 mm
Pull for 1% elongation (K1%)		15 N/mm
Minimum pulley diameter		125 mm
Permanent antistatic dynamic (UNI EN 1718)		Yes
Operating temperature	Min.	-20 °C
	Max.	+100 °C
Belt weight		3.5 kg/m ²
Joining system		Skived joint

Belt design

Friction cover reverse side (spindle)	Rubber, green, medium structure
Traction layer	Polyamide foil
Friction cover driving side (pulley)	Rubber, light green, medium structure

Key features

- Robust belt design for high demanding applications
- High abrasion and temperature resistance
- Constant coefficient of friction over time
- High resistance to oils and fat

Issue date: 9.6.2008

Last modification: 21.2.2011

Disclaimer

The information contained in this document describes the features of the product as tested in a laboratory environment at a temperature of +23 degrees C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the product. The belt manufacturer cannot be held responsible should damages arise from the use of its products. Necessary alterations to this data can be made without prior notice.

Rev. #6484